


Powerful Multi-Group Control Centre

RWZ 5f-MS



Certified

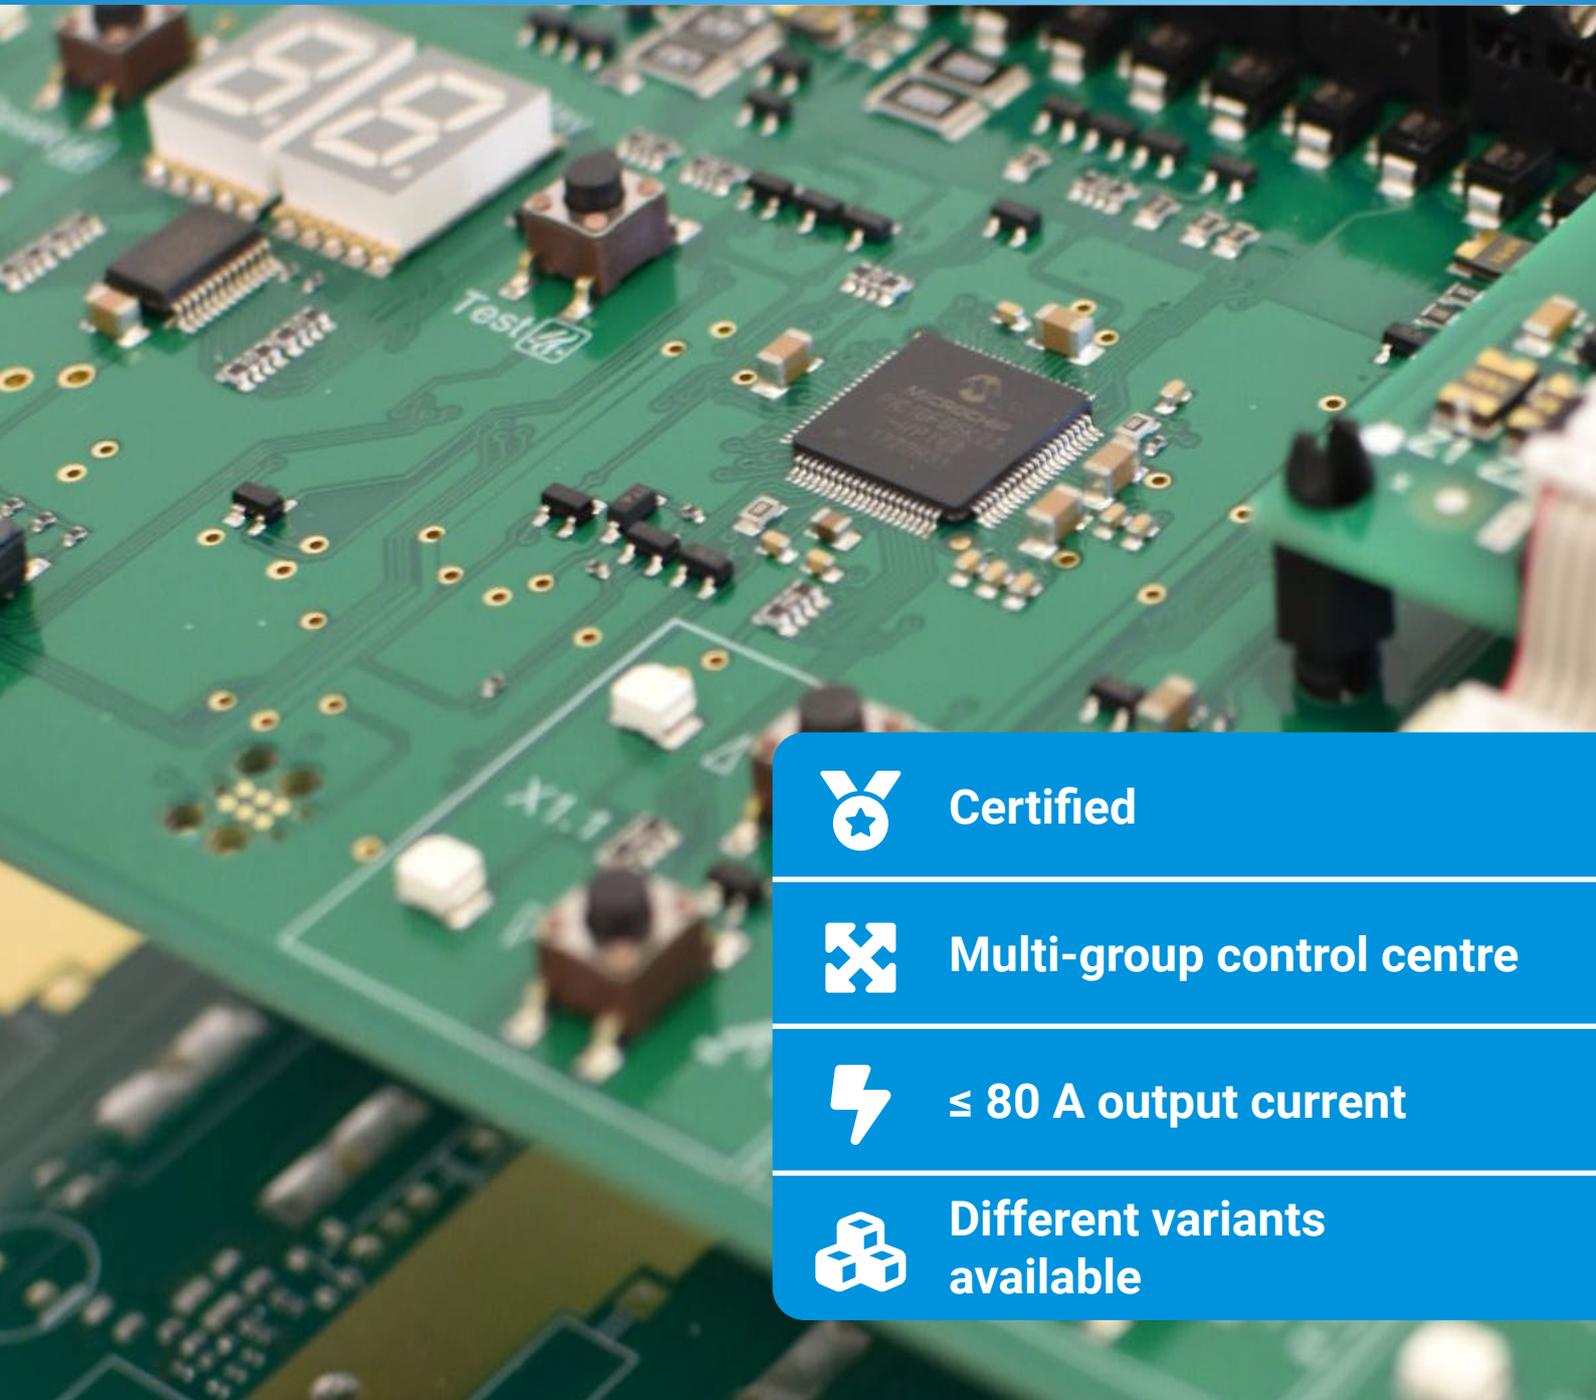


Multi-group control centre



≤ 80 A output current



Different variants
available

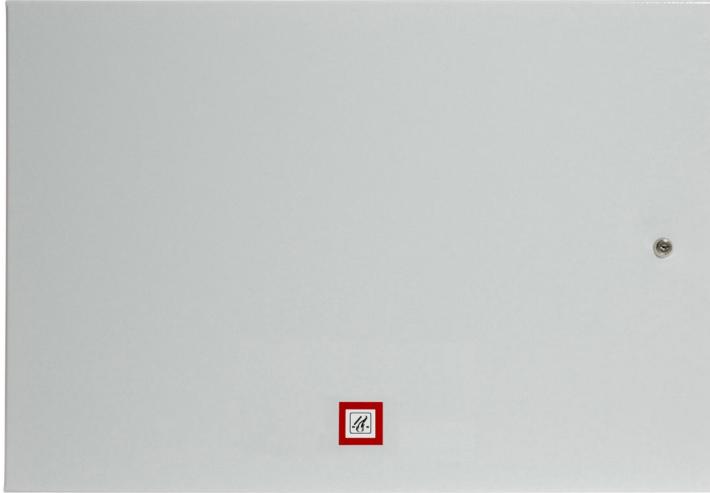


Technical data

Voltage supply	400 V~/50 – 60 Hz
Inrush current	~ 105 A
Standby time	72 h in case of mains failure
Enclosure material	Sheet steel
Colour	Light grey (~ RAL 7035)
Operating temperature	-5 °C – +40 °C
Relative humidity	20 % – 80 %, non-condensing
Protection rating	IP30
Dimensions (W x H x D)	800 x 600 x 255 mm

This certified multi-group control centre is available in different variants with different output currents. The configuration of the SHE and ventilation groups is set at the factory.

Variants

Type designation	Part number	Output current	Accumulators (AGM, VRLA)
RWZ 5f-x.y-60	8100 5660 20xy	60 A (24 V $\overline{=}$ /1440 W)	2 x 26 Ah/12 V
RWZ 5f-x.y-80	8100 5680 20xy	80 A (24 V $\overline{=}$ /1920 W)	2 x 42 Ah/12 V

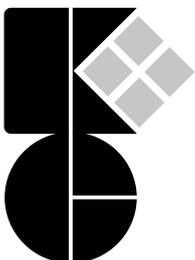

TECTRONIC

K + G Tectronic GmbH
In der Krause 48
52249 Eschweiler
Germany

+49 2403 99 500
info@kg-tectronic.de

