



Individual components of mounting kits for actuators Type S:


LB 12-SL5-M5x6: Bearing pins for actuators Type **S**, Ø12mm, shank length 5mm, incl. hexagons socket head cap screw M5x6mm (DIN 912). Two pieces are required for each actuator

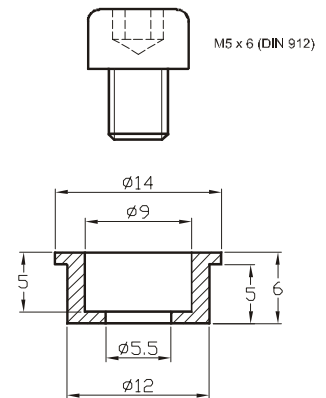


KB-F6: Coupling bracket with spring bolt Ø6mm

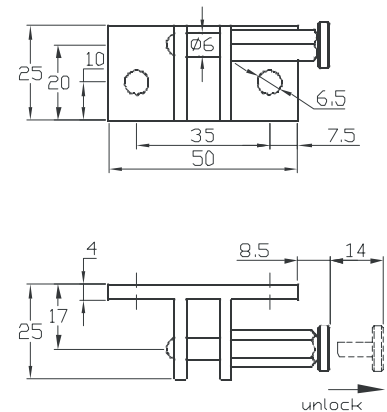

MK 13-1-B6: Mounting bracket of galvanized sheet steel for actuators Type **S**. 13mm inner width, Type 1, including bolt Ø6mm

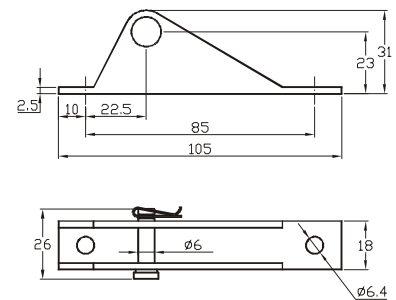


MK 36-1: Mounting bracket of galvanized sheet steel for actuators Type **S**. 36mm inner width, Type 1

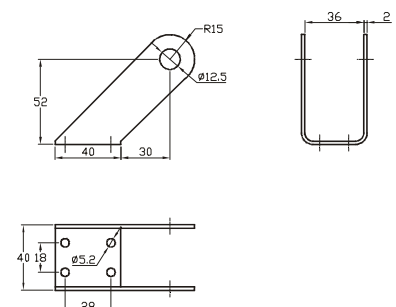


Actuators/Actuator controls

Linear actuators

MK F-1: Window bracket of galvanized sheet steel for mounting electrical actuators on pivot-hung or swinging window casements

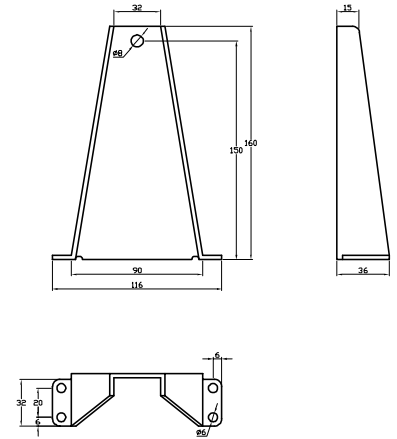

MK F-B6-2: Fastening bolt as a link between window bracket **MK F-1** and actuator Type **S**

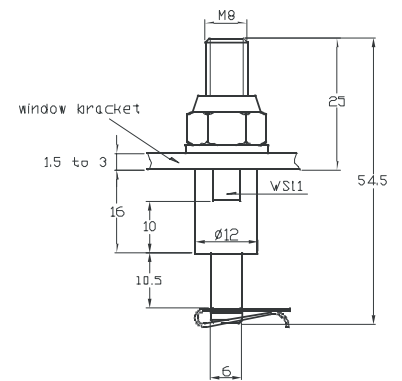

KR 47-36: Aluminium clamping ring for variable mounting of actuators Type **S**. I.D. 36mm, with channel for fixing the actuator supply cable

