


Mounting accessories for actuators Type G, SG and E


With respect to actual mounting conditions and forces to be dealt with, please contact us for clarification of the assembly components to be selected.

Bearing pins / fixing plugs:

LB 12-SL5-M5x8: Bearing pins for actuators Type **G**, Ø12mm, shank length 5mm (short type), including hexagon socket head cap screw M5x8mm (DIN 912). Two pieces are required for each actuator

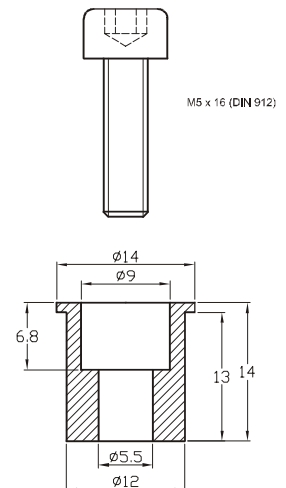


LB 12-SL13-M5x16: Bearing pins for actuators Type **G**, **SG 08x** - **SG 26x**, Ø12mm, shank length 13mm, incl. hexagon socket head cap screw M5x16mm (DIN 912). Two pieces are required for each actuator

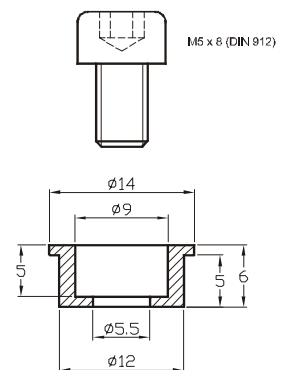

LB 18-2-SL13-2xM5x16: Bearing pins for actuators Type **SG 40x** - **SG 80x**, Ø18mm, shank length 13mm, incl. hexagon socket head cap screw M5x16mm (DIN 912). Two pieces are required for each actuator

ST 12-1/8: Fixing plugs 1/8" for actuators Type **E**, Ø12mm, shank length 13mm. Two pieces are required for each actuator



Mounting accessories for actuators Type G,SG and E

Eyebolts:

AS M8x40-Ø6: Eyebolt including locknut, galvanized steel. Thread M8x40mm, eye diameter 6mm

AS M8x40-Ø8: Eyebolt including locknut, galvanized steel. Thread M8x40mm, eye diameter 8mm



AS M8x40-Ø10: Eyebolt including locknut, galvanized steel. Thread M8x40mm, eye diameter 10mm

AS M8x60-Ø8: Eyebolt including locknut, galvanized steel. Thread M8x60mm, eye diameter 8mm. When using this eyebolt, installation size will be 20mm greater

AS M8x60-Ø10: Eyebolt including locknut, galvanized steel. Thread M8x60mm, eye diameter 10mm. When using this eyebolt, installation size will be 20mm greater

AS M8x80-Ø8: Eyebolt including locknut, galvanized steel. Thread M8x80mm, eye diameter 8mm. When using this eyebolt, installation size will be 40mm greater

AS M8x80-Ø10: Eyebolt including locknut, galvanized steel. Thread M8x80mm, eye diameter 10mm. When using this eyebolt, installation size will be 40mm greater

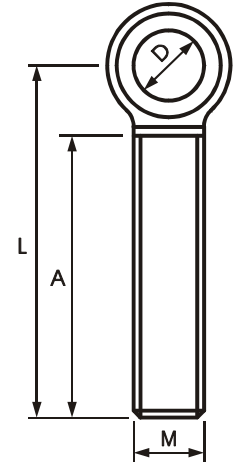


measures (mm)	A	B	D	H	L	M
AS M8x40-Ø6	30	7,5	6,1	18	40	M8
AS M8x40-Ø8	30	7,5	8,1	18	40	M8
AS M8x40-Ø10	30	7,5	10,1	18	40	M8
AS M8x60-Ø8	50	7,5	8,1	18	60	M8
AS M8x60-Ø10	50	7,5	10,1	18	60	M8
AS M8x80-Ø8	40	7,5	8,1	18	80	M8
AS M8x80-Ø10	40	7,5	10,1	18	80	M8



Mounting accessories for actuators Type G,SG and E

Coupling brackets and bolts:

KB-F6: Coupling bracket with spring bolt Ø6mm

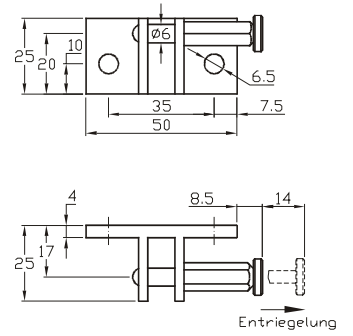


KB-KBB 6: Coupling bracket with bolt Ø6mm (including washer and cotter pin)

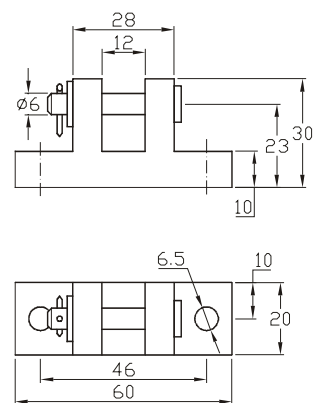


Mounting accessories for actuators Type G,SG and E

Coupling brackets and bolts:

KB-KBB 8: Coupling bracket with bolt Ø8mm (including washer and cotter pin)

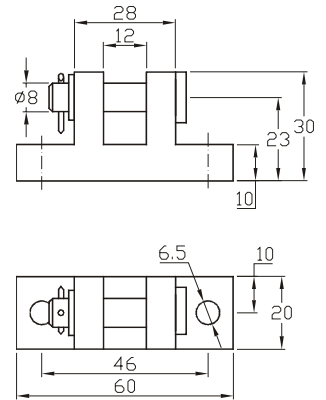


KB-KBB 10: Coupling bracket with bolt Ø10mm (including washer and cotter pin)

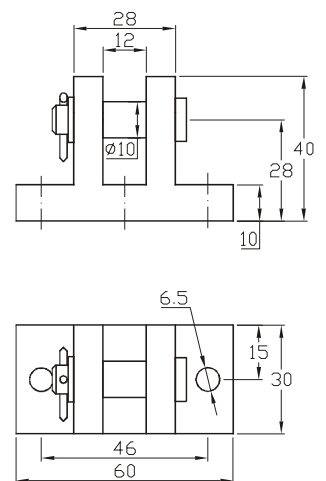


Mounting accessories for actuators Type G, SG and E

Mounting brackets:


MK 24-1-KBB 8: Mounting bracket of galvanized steel for actuators Type **G** with option **UF Ø8,2** (mounting at lower end for fastening to window). 24mm inner width, Type 1, including fastening bolt Ø8mm



MK 47-1: Mounting bracket of galvanized steel for actuators Type **G, SG**. 47mm inner width, Type 1




MK 47-2: Mounting bracket of galvanized steel for actuators Type **G, SG**. 47mm inner width, Type 2




Mounting accessories for actuators Type G, SG and E

MK 47-3: Mounting bracket of galvanized steel for actuators Type **G, SG**.
47mm inner width, Type 3




MK 47-4: Mounting bracket of galvanized steel for actuators Type **G, SG**.
47mm inner width, Type 3

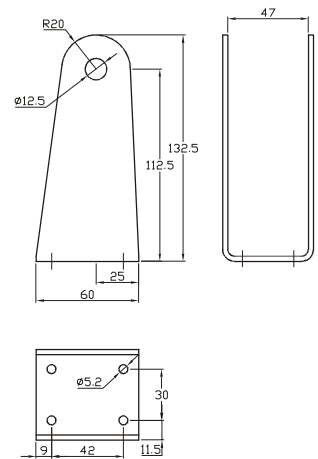

MK 56-1: Mounting bracket of galvanized steel for actuators Type **E**. 56mm
inner width, 60 x 62 x 90mm, Type 1


MK 56-2: Mounting bracket of galvanized steel for actuators Type **E**. 56mm
inner width, 60 x 62 x 115mm, Type 2

MK 56-3: Mounting bracket of galvanized steel for actuators Type **E**. 56mm
inner width, 60 x 62 x 80mm, Type 3





Mounting accessories for actuators Type G,SG and E

MK F-1: Window bracket of galvanized sheet steel for mounting electrical actuators on pivot-hung or swinging window casements

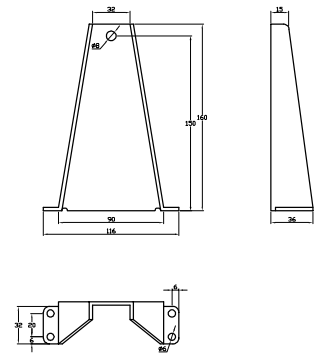

MK F-B6: Fastening bolt as a link between window bracket **MK F-1** and eyebolt. Bolt diameter 6mm

MK F-B8: Fastening bolt as a link between window bracket **MK F-1** and eyebolt. Bolt diameter 8mm

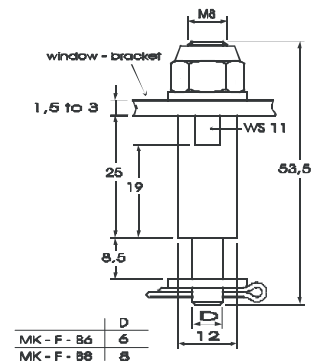

MK W-1: Angle bracket for fastening of mounting brackets rotated through 90° (requires reboring of **MK 47-3**)